

「塀のねっこ」寸法表 1

L型 厚さ(t)150

<設計条件>


- 周辺土・埋戻し土の土質：砂質土
- 内部摩擦角φ：30°
- 単位体積重量γ (kN/m³): 18
- 摩擦係数μ：0.55
- 水平震度kh：0.6
- 基準風速 (m/s)：50
- 地下水位：底板以下

<準拠する規準類>


- 建築基準法、同施行令、及び関連告示
- 鉄筋コンクリート構造計算規準・同解説
- 壁式鉄筋コンクリート造設計・計算規準・同解説
- 建築基礎構造設計指針
- 建築物荷重指針・同解説
- 他、関連指針

(寸法単位：mm)


高さ	縦壁厚	底板厚	ハンチ	製品長			底板幅			重量 (kg)			根入 〔前面共〕	最大根入差	最大地上高	必要地耐力 (kN/m ²)						
				直線	片R	両R	標準	片R	両R	標準	片R	両R										
H	t	tf	c	L			B			W			Df	Dfd	h	追加 背面土						
																有り(最大) 無し						
500	150	150	150	2,000 ・ 1,000	2,075 ・ 1,075	2,150	350	350	350	558	569	579	300	200	200	24						
600	150	150	150				400	450	450	666	679	691				300	300	14				
700	150	150	150				450	450	450	774	789	804						300	400	16		
800	150	150	150				450	550	550	846	863	880								300	500	17
900	150	150	150				450	500	500	918	937	956										300
1,000	150	150	150				500	650	650	1,026	1,047	1,068		300	600							
1,100	150	150	150				550	650	650	1,134	1,157	1,181				300	700					
1,200	150	150	150				600	650	650	1,242	1,267	1,293						300	800			
1,300	150	150	150				650	750	750	1,350	1,378	1,405								300	900	
1,400	150	150	150				700	750	750	1,458	1,488	1,517										300
1,500	150	150	150				700	750	800	1,530	1,562	1,594	300	1,050	29							
1,600	150	150	150				750	750	800	1,638	1,672	1,706			300	1,150	30					
1,700	150	150	150				800	850	900	1,746	1,782	1,818					300	1,250	30			
1,800	150	150	150				900	900	1000	1,890	1,928	1,966							300	1,350	30	
1,900	150	150	150				950	1,000	1,100	1,998	2,038	2,079									300	1,450
2,000	150	150	150				950	1,000	1,100	2,070	2,112	2,155	300	1,500								
2,100	150	150	150				1,000	1,050	1,100	2,178	2,223	2,267			300	1,600						
2,200	150	150	150				1,100	1,100	1,200	2,322	2,369	2,415					300	1,700				
2,300	150	150	150				1,150	1,200	1,300	2,430	2,479	2,528							300	1,800		
2,400	150	150	150				1,200	1,250	1,350	2,538	2,589	2,640									300	1,900
2,500	150	150	150				1,300	1,350	1,450	2,682	2,735	2,788	300	2,000								
2,600	150	150	150				1,350	1,400	1,550	2,790	2,845	2,900			300	2,100						
2,700	150	150	150				1,450	1,500	1,650	2,934	2,991	3,049					300	2,200				
2,800	150	150	150				1,550	1,550	1,700	3,078	3,137	3,197							300	2,300		
2,900	150	150	150				1,600	1,650	1,800	3,186	3,247	3,309									300	2,400
3,000	150	150	150				1,700	1,700	1,850	3,330	3,394	3,457	300	2,500								

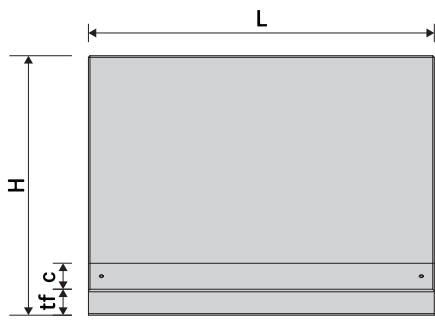

背面図

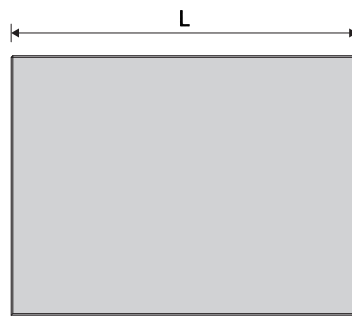


正面図

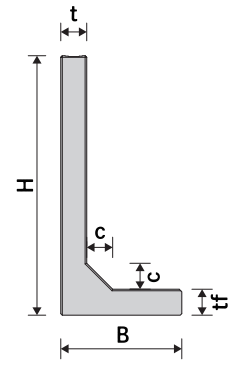


側面図


標準品

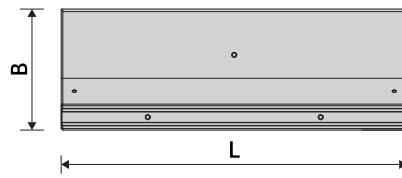


平面図

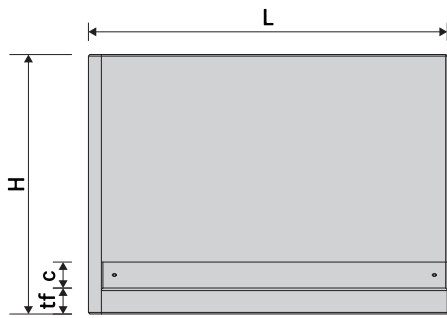

背面図

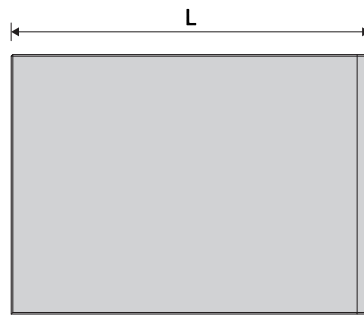


正面図

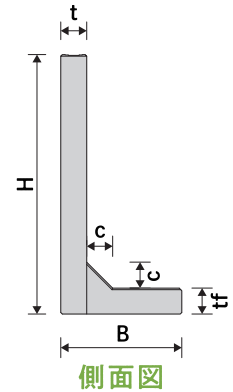


側面図

片端部R


※R部は左右どちらも製造可

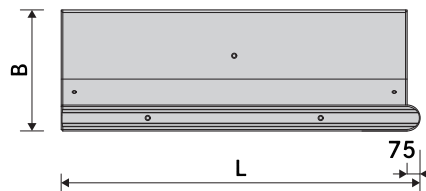


平面図

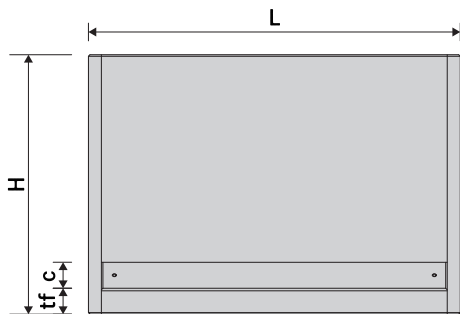

背面図

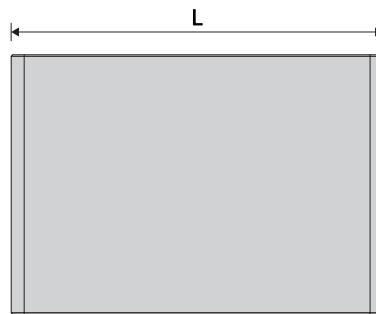


正面図

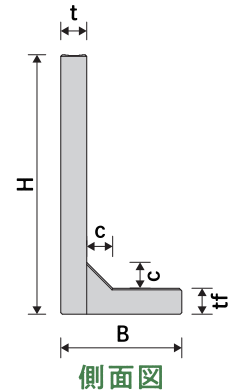

側面図

両端部R

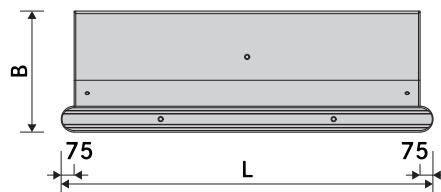

平面図